

Rosengrens the European


Burglary and fire protection of valuables



The European is a complete range of high graded burglary resistant safes. The whole range is tested and certified according to the demanding European norm EN 1143-1 in Grades II-VI. In addition all safes have a fire protection to withstand a fire for 1 hour. The European range is available in 6 sizes and has a wide range of interior fittings. The safes can also offer a combined storage. By adding a special insert in the safe you are able to store and protect data media such as CDs, DAT cassettes and DLT tapes against fire. As standard all the European models are equipped with Rosengrens key lock RKL-10.

Rosengrens the European

Burglary and fire protection of valuables

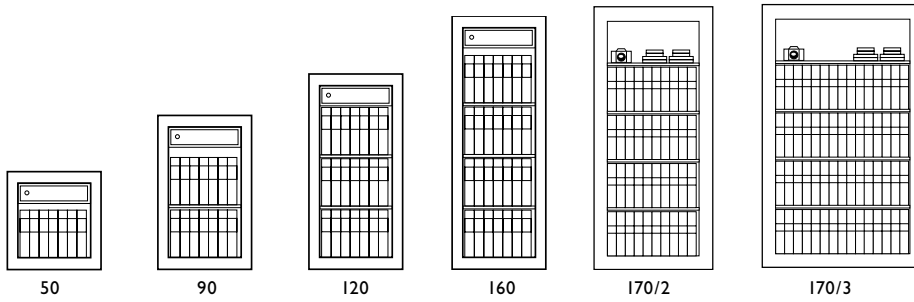

Grade-Model the European	External dimensions (mm)			Internal dimensions (mm)			Weight (kgs)	Vol. (lit)	No. shelves
	Height	Width	Depth*	Height	Width**	Depth			
II-50	650	650	640	500	500	400	510	100	1
II-90	1050	650	640	900	500	400	725	180	2
II-120	1350	650	640	1200	500	400	900	240	3
II-160	1750	650	640	1600	500	400	1135	320	3
III-50	700	700	690	500	500	400	700	100	1
III-90	1100	700	690	900	500	400	990	180	2
III-120	1400	700	690	1200	500	400	1230	240	3
III-160	1800	700	690	1600	500	400	1515	320	3
IV-50	700	700	690	500	500	400	690	100	1
IV-90	1100	700	690	900	500	400	1040	180	2
IV-120	1400	700	690	1200	500	400	1300	240	3
IV-160	1800	700	690	1600	500	400	1600	320	3
IV-170/2	1900	860	735	1700	660	451	2000	500	0
IV-170/3	1900	1160	735	1700	970	451	2500	735	0
V-90	1100	700	690	900	500	400	1085	180	2
V-120	1400	700	690	1200	500	400	1348	240	3
V-160	1800	700	690	1600	500	400	1680	320	3
V-170/2	1900	860	735	1700	660	436	2300	500	0
V-170/3	1900	1160	735	1700	970	451	2950	735	0
VI-90	1150	750	740	900	500	400	1250	180	2
VI-120	1450	750	740	1200	500	400	1535	240	3
VI-160	1850	750	740	1600	500	400	1910	320	3

* Additional 65 mm extra depth with handle ** Deduct 10 mm for shelfstrip

Interior fittings

- Fixed shelf**
For 50-160
Size 20x487x380
For 170/2
Size 15x645x425
For 170/3
Size 15x955x425
- Data media insert, 60 DIS**
Ext. size 364x470x370
Int. size 278x384x284
- Extensible shelf**
For 50-160
Size 50x445x385
- Extensible file frame A4/Folio**
For 50-160
Size 32x480x334
- Lockable compartment**
For 50-160
Ext. size 165x497x360
Int. size 145x460x320
- For 50-160**
Ext. size 350x497x360
Int. size 330x460x320
- Lockable drawer**
For 50-160
Ext. size 110x497x360
Int. size 84x450x350

Burglary protection: The European range is tested according to the demanding European norm EN 1143-1 in security Grades II-VI and certified by ECB•S. In Grades III, IV and VI the safes have a supplementary explosive test, which can be ordered as an option.

Fire protection: The European safes are also tested and certified according to LPCB in fire-class 60 P for paper, which means that the safes will withstand a fire for 60 minutes.

Locks: All models are standard equipped with our own unique resettable key lock RKL-10 which has more than 90 million key variation possibilities. The safe can also be equipped with combination lock or electronic lock as options.

Design: The European is attractively finished in off-white and blends in well in both modern and classic surroundings. All the European safes are prepared for floor anchoring.

Quality and environmental management systems: The European series are all manufactured in accordance with the ISO 9001 quality management system and the ISO 14001 environmental management system.

Rosengrens Product Guidelines: The construction of the European has been tested and approved to the Rosengrens Product Guidelines which are based on all relevant European norms. The aim is to verify the user friendliness, safety and product lifetime, thereby assuring customers that our products live up to the highest expectations.

Rosengrens Tann

A trading division of Gunnebo UK Ltd
PO Box 61
Woden Road
Wolverhampton
United Kingdom

Tel: 0870 607 0076 Email: marketing@gunnebouk.com
Fax: 01902 459314 Website: www.rosengrens.co.uk

Member of the Gunnebo security group